



Relação do aço						
Conte C-C		Negativos (780)		Positivos (780)		
ACO	N	DIAM	Q	UNIT	C TOTAL	
				(cm)	(cm)	
CA50	2	5,0	26	88	2222	
	1	5,0	26	88	2222	
	3	5,0	26	88	2222	
	4	5,0	4	259	1056	
	5	5,0	16	59	944	
	4	5,0	14	261	3654	
	6	5,0	14	261	3654	
	7	5,0	14	261	3654	
	8	5,0	5	14	261	3654
	9	5,0	5	14	261	3654
CA50	10	5,0	5	14	261	3654
	10	5,0	5	14	261	3654
	11	6,3	52	207	10764	
	12	6,3	52	207	10764	
	11	6,3	40	170	6800	
	13	6,3	40	170	6800	
	14	6,3	40	170	6800	
	15	10,0	18	261	4688	
	16	10,0	18	261	4688	
	17	10,0	24	384	7296	
	17	10,0	24	384	7296	
	18	10,0	32	184	3688	
	19	10,0	32	184	3688	
	20	12,5	2	197	354	
	21	12,5	2	197	354	
	22	16,0	2	261	1044	
	23	16,0	2	261	1044	
	24	16,0	4	276	516	
	25	16,0	4	276	516	
	26	16,0	1	276	276	
	26	16,0	1	276	276	

Corte C-C
escala 1:25

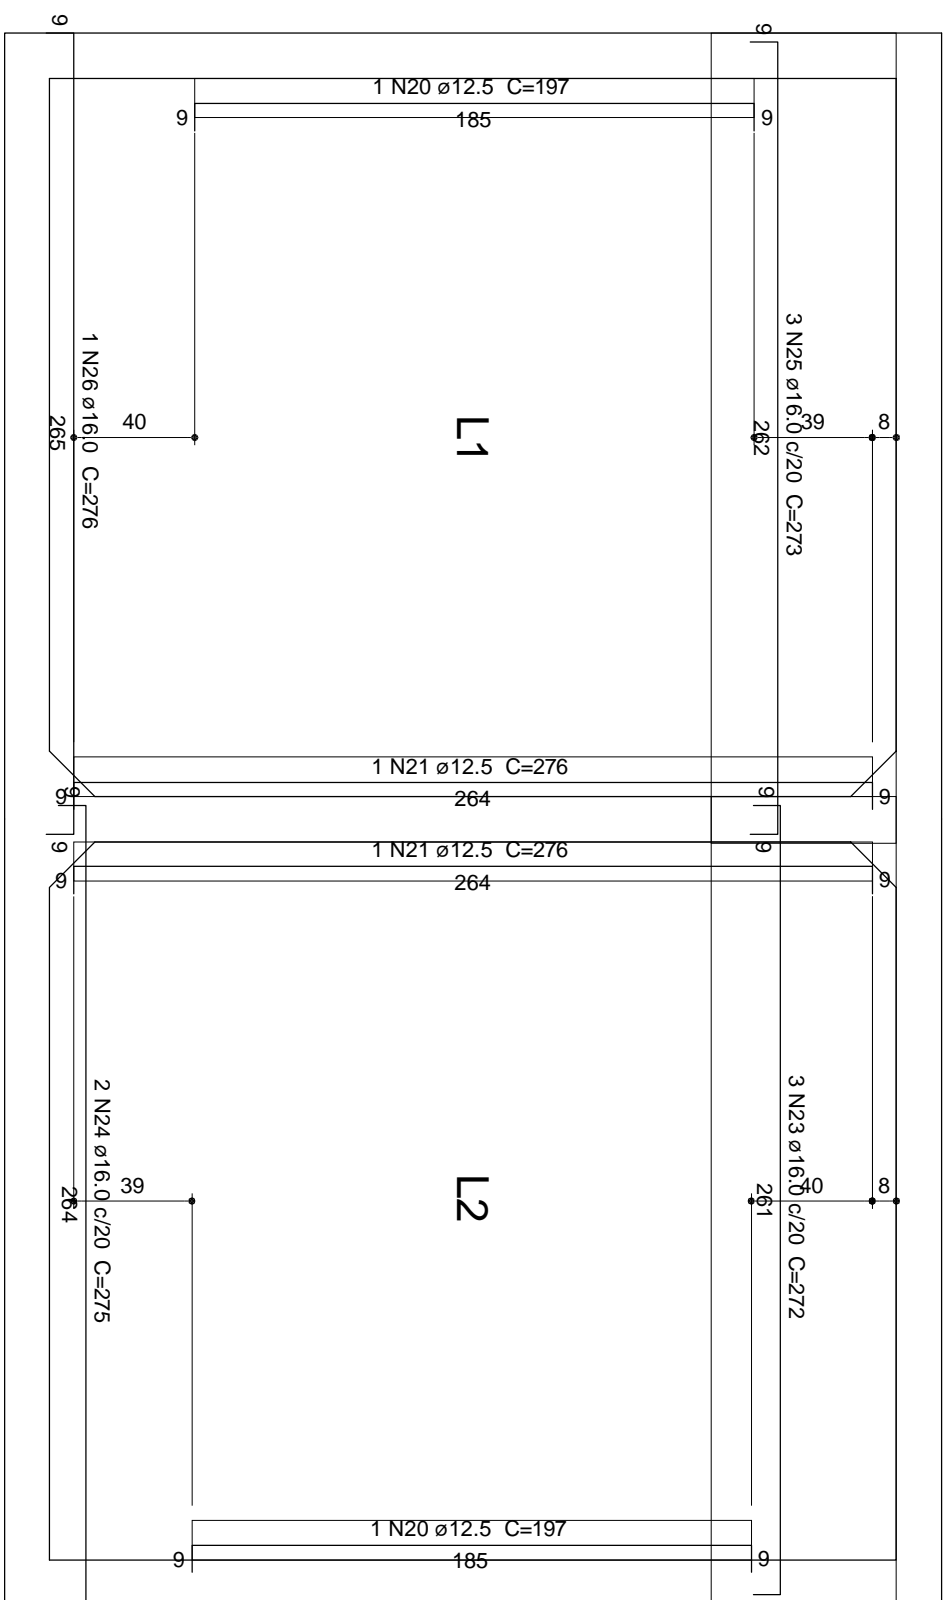

Armação positiva das lajes (780.0)
escala 1:25

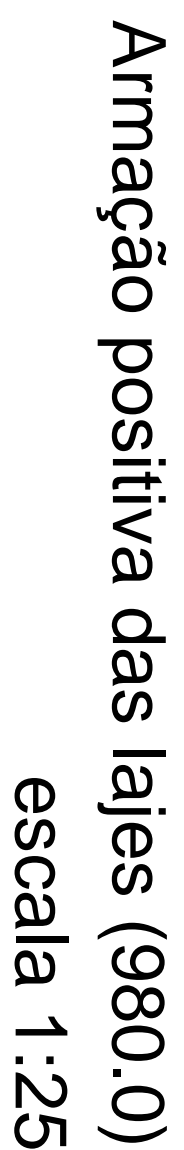

AÇO	DIAM	C.TOTAL (m)	PESO (kg)
CA60	6.3	295.5	72.3
	8.0	250	98.6
	10.0	59.2	36.5
	12.5	9.5	9.1
	16.0	35.1	55.3
CA60	5.0	238.9	36.8
PESO TOTAL			
CA50	271.9		
CA60	36.8		

Armação negativa das lajes (780.0)
escala 1:25